


EZ Transformers Specifications

- **Group AG**
 1. **Primary Voltage : 240/480 VAC @ 50/60Hz**
 2. **Secondary Voltage : 120/240 VAC**
- **Group HG**
 1. **Primary Voltage : 208/277/380 VAC @ 50/60Hz**
 2. **Secondary Voltage : 120/240 VAC**
- **Group KA**
 1. **Primary Voltage : 120/240 VAC @ 50/60Hz**
 2. **Secondary Voltage : 12/24 VAC**
- **Group JE**
 1. **Primary Voltage : 240/480 VAC @ 50/60Hz**
 2. **Secondary Voltage : 25/120 VAC**

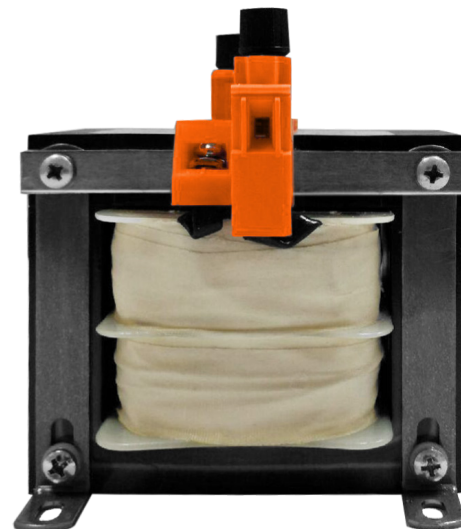

Specification	Detail
Frequency	50/60 Hz
Operating Temperature	-20° to 40°C (-4° to 104°F)
Wire	UL 1015, Gauge: AWG (depending on power rating)

EZ Transformers Fuse Kit Accessories

Touch Safe Primary and Secondary Fuse Kits



EZ Fuse Kit Table		
Part Number	Description	Price
EZCT-PF-1	Primary side Voltage Fuse Kit 50 - 250 VA, Slow blowing fuse	\$6
EZCT-PF-2	Primary side Voltage Fuse Kit 300 - 500 VA, Slow blowing fuse	\$8
EZCT-PF-3	Primary side Voltage Fuse Kit 750 - 1500 VA, Slow blowing fuse	\$10
EZCT-SF-1	Secondary side Voltage Fuse Kit 50 - 250 VA, Fast acting fuse	\$6
EZCT-SF-2	Secondary side Voltage Fuse Kit 300 - 500 VA, Fast acting fuse	\$8
EZCT-SF-3	Secondary side Voltage Fuse Kit 750 - 1500 VA, Fast acting fuse	\$10