




EZPLCX-X-32 Specifications

EZPLC 32 I/O features:

- Highest Processing power per cubic inch.
- Incredibly condensed, 31 different combo plug-in I/O modules.
- Easiest Drag-n-Drop programming software for \$69
- Free Flow Logic cuts down number of rungs by at least 50%
- Communications galore, DeviceNet, Profibus, all Industrial Ethernet protocols. (DH+/RIO coming soon)
- Advanced functionalities, Math, High Speed counters.
- 32 bit Floating point Math and Logic
- 8 Auto tuned PID loops & unique PID monitor
- Highest processing speed, 40 μ s response to Interrupt
- RS422/485 Modbus Master Port
- Advanced instructions: Data convert, move block, bit move, strings and subroutines
- Modular Expandable to 2048 I/O
- Flash Memory Module to upload program without laptop, software or cable
- Status LED for each I/O in every model and Plug-in Terminal Blocks.

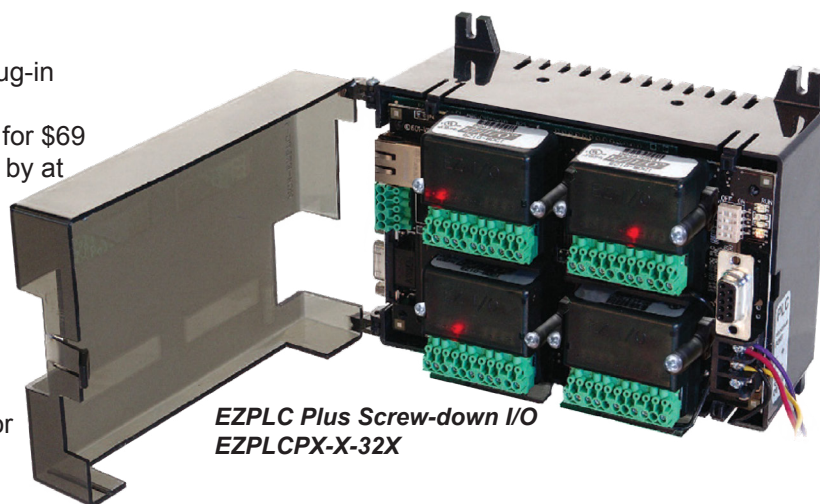

MODULES NOT INCLUDED WITH BASE

| Model Number | Interface | Price | Del. |
|---|---|----------------|------|
| EZPLCP-A-32 EZPLCPJ-A-32 | AC Model – 32 I/O Base comes with RS232 port 1 and RS422/485 port 2, and a Male connector for plugging in DeviceNet or Profibus option cards. Screw-down I/O. EZPLCPJ Junior models have only 1 RS232 port | \$259 \$129 | STK |
| EZPLCP-A-32E | AC Model – 32 I/O Enhanced Ethernet Base comes with RS232 port 1, RS422/485 port 2, Ethernet port 3 and a Male connector for plugging in DeviceNet or Profibus option cards. Screw-down I/O. | \$279 | 3DAY |
| EZPLCP-D-32 EZPLCPJ-D-32 | DC Power – 32 I/O Base comes with RS232 port 1 and RS422/485 port 2, and a Male connector for plugging in DeviceNet or Profibus option cards. Screw-down I/O. EZPLCJ and EZPLCPJ Junior models have only 1 RS232 port | \$299 \$119 | STK |
| EZPLCP-D-32E | DC Power – 32 I/O Enhanced Ethernet Base comes with RS232 port 1, RS422/485 port 2, Ethernet port 3 and a Male connector for plugging in DeviceNet or Profibus option cards. Screw-down I/O. | \$349 | 3DAY |

NOTE: EZPLC Jr. has only RS232 port and no other connector

**No limitation on I/O module location except:
Bottom left module cannot be AC output module * Does not apply to EZPLC Jr.**

