

# EZ iMarquee - 4 Lines 20 Character

## 4 Lines 20 Characters - NEMA 12

The 4 Line 20 Char EZMarquee can hold up to a maximum of 20 characters (2") per line and features 4 lines of Tri-Color LEDs. EZMarquees are enclosed in NEMA 12 extruded aluminum housing with NEMA ICS 2-230 level of electrical noise immunity. All 4 Line 20 Character models are capable of communicating over RS232, RS422/485 and Ethernet. This is a Master and Slave LED Message Display with built-in PLC protocols and data logger.

### Characteristics:


Character Height:	2" / 4" / 6" / 8"
Characters per Line:	20 / 10 / 6 / 5
Number of Lines:	4 / 2 / 1 / 1
Visibility:	100'/200'/300'/400'

## 4 Lines 20 Characters feature:

- 4 lines of 20 characters max
- Pre-matched LEDs
- 24 Hour Burn-In tested
- International Character Set
- Hang Mounting
- NEMA 12 Housing
- NEMA ICS 2-230
- 110/220 VAC Power Input
- Surge Protection
- 100,000+ Hours Rated Life

## iMarquee features:

- Built-in PLC Protocols to Major Brand PLCs
- Store messages locally on the EZ iMarquee
- No PLC Ladder Logic Changes required to display plant / machine messages or alerts
- Datalogging Built-in
- Webserver with Remote Access
- Built-in Message Database
- Built-in Alarm Database
- Advanced Scripting/Logic within the Marquee Display itself

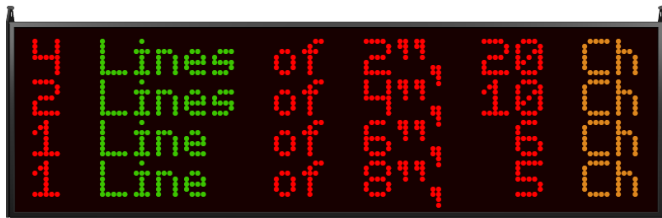

Model Number	Interface	Price	Del.
EZiMT-4L20C	RS232, RS422/485 and Ethernet included	\$2499	7 DAY

## 4 Lines 20 Characters Dimensions

