

EZMarquee - 1 Line 10 Characters (Indoor Sunlight)

1 Line 10 Characters - NEMA 12

The 1 Line 10 Char EZMarquee can hold up to a maximum of 10 characters (2") per line and features 1 line of RED/Tri-Color LEDs. EZMarquees are enclosed in NEMA 12 extruded aluminum housing with NEMA ICS 2-230 level of electrical noise immunity.

All 1 Line 10 Character models are capable of communicating over RS232 and RS422/485 along with different models for Ethernet, DeviceNet and Profibus connectivity.

Characteristics:

Character Height:	2"
Characters per Line:	10
Number of Lines:	1
Visibility:	100'

1 Line 10 Characters feature:

- 1 line of 10 characters max
- Pre-matched LEDs
- 24 Hour Burn-In tested
- International Character Set
- Hang Mounting
- NEMA 12 Housing
- NEMA ICS 2-230
- 110/220 VAC Power Input
- Surge Protection
- 100,000+ Hours Rated Life

See the different communication interface options available in the charts below





RED Indoor

RED High-bright

Model Number	Interface	Price	Del.
EZMRH-1L10C	RS232 and RS422/485 only	\$899	STK
EZMRH-1L10C-E	Ethernet included	\$1199	3DAY
EZMRH-1L10C-D	DeviceNet included	\$1199	3DAY
EZMRH-1L10C-P	Profibus included	\$1199	3DAY

1 Line 10 Characters Dimensions

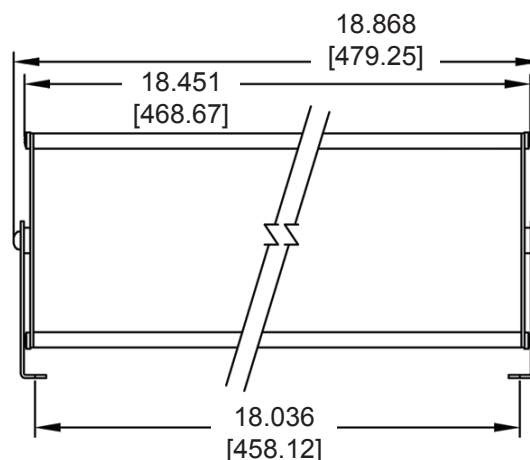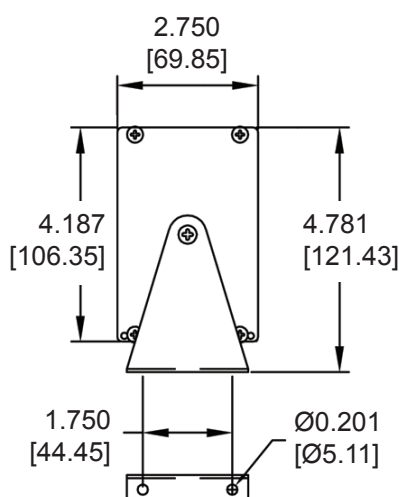

MOUNTING HOLE CENTERS

EZMarquee - 1 Line 10 Characters (Outdoor Sunlight)

1 Line 10 Characters - NEMA 4X

The 1 Line 10 Char EZMarquee can hold up to a maximum of 10 characters (2") per line and features 1 line of RED/Tri-Color LEDs. EZMarquees are enclosed in NEMA 4X extruded aluminum housing with NEMA ICS 2-230 level of electrical noise immunity.

All 1 Line 10 Character models are capable of communicating over RS232 and RS422/485 along with different models for Ethernet, DeviceNet and Profibus connectivity.

Characteristics:

Character Height:	2"
Characters per Line:	10
Number of Lines:	1
Visibility:	100'

1 Line 10 Characters feature:

- 1 line of 10 characters max
- Pre-matched LEDs
- 24 Hour Burn-In tested
- International Character Set
- Hang Mounting
- NEMA 12 Housing
- NEMA ICS 2-230
- 110/220 VAC Power Input
- Surge Protection
- 100,000+ Hours Rated Life

See the different communication interface options available in the charts below




RED Outdoor

RED Outdoor Highbright

Model Number	Interface	Price	Del.
EZMRH-1L10C-OUT	RS232 and RS422/485 only	\$1399	STK
EZMRH-1L10C-E-OUT	Ethernet included	\$1699	3DAY
EZMRH-1L10C-D-OUT	DeviceNet included	\$1899	3DAY
EZMRH-1L10C-P-OUT	Profibus included	\$1799	3DAY

1 Line 10 Characters Dimensions

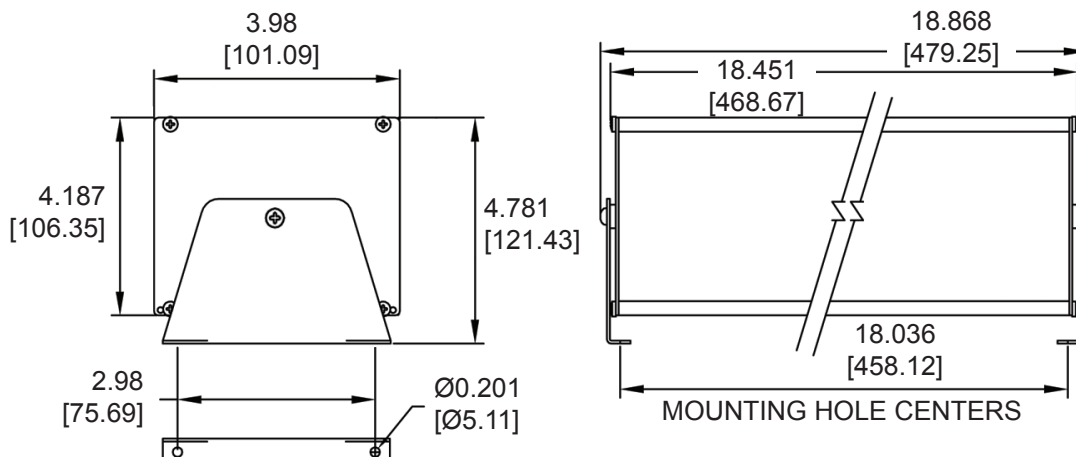

EZMarquee - 2 Lines 10 Characters (Indoor Sunlight)

2 Lines 10 Characters - NEMA 12

The 2 Line 10 Char EZMarquee can hold up to a maximum of 10 characters (2") per line and features 2 lines of RED/Tri-Color LEDs. EZMarquees are enclosed in NEMA 12 extruded aluminum housing with NEMA ICS 2-230 level of electrical noise immunity.

All 2 Line 10 Character models are capable of communicating over RS232 and RS422/485 along with different models for Ethernet, DeviceNet and Profibus connectivity.

Characteristics:

Character Height:	2" / 4"
Characters per Line:	10 / 5
Number of Lines:	2 / 1
Visibility:	100' / 200'

2 Lines 10 Characters feature:

- 2 lines of 10 characters max
- Pre-matched LEDs
- 24 Hour Burn-In tested
- International Character Set
- Hang Mounting
- NEMA 12 Housing
- NEMA ICS 2-230
- 110/220 VAC Power Input
- Surge Protection
- 100,000+ Hours Rated Life

See the different communication interface options available in the charts below





RED Indoor

RED High-bright

Model Number	Interface	Price	Del.
<i>EZMRH-2L10C</i>	RS232 and RS422/485 only	\$1399	STK
<i>EZMRH-2L10C-E</i>	Ethernet included	\$1599	3DAY
<i>EZMRH-2L10C-D</i>	DeviceNet included	\$1699	3DAY
<i>EZMRH-2L10C-P</i>	Profibus included	\$1699	3DAY

2 Lines 10 Characters Dimensions

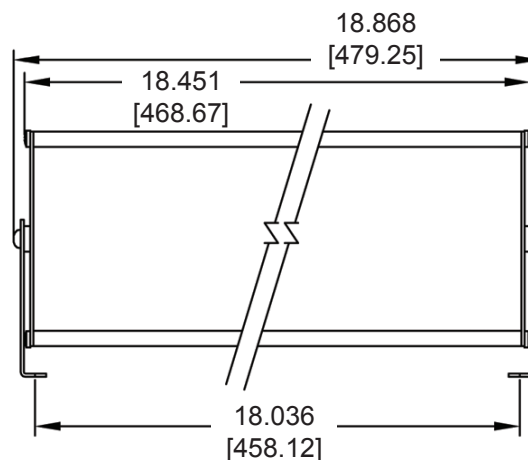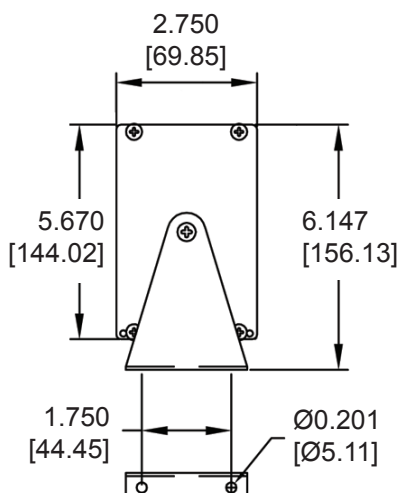

MOUNTING HOLE CENTERS

EZMarquee - 2 Lines 10 Characters (Outdoor Sunlight)

2 Lines 10 Characters - NEMA 4X

The 2 Line 10 Char EZMarquee can hold up to a maximum of 10 characters (2") per line and features 2 lines of RED/Tri-Color LEDs. EZMarquees are enclosed in NEMA 4X extruded aluminum housing with NEMA ICS 2-230 level of electrical noise immunity.

All 2 Line 10 Character models are capable of communicating over RS232 and RS422/485 along with different models for Ethernet, DeviceNet and Profibus connectivity.

Characteristics:

Character Height:	2" / 4"
Characters per Line:	10 / 5
Number of Lines:	2 / 1
Visibility:	100' / 200'

2 Lines 10 Characters feature:

- 2 lines of 10 characters max
- Pre-matched LEDs
- 24 Hour Burn-In tested
- International Character Set
- Hang Mounting
- NEMA 12 Housing
- NEMA ICS 2-230
- 110/220 VAC Power Input
- Surge Protection
- 100,000+ Hours Rated Life

See the different communication interface options available in the charts below




RED Outdoor

RED Outdoor Highbright

Model Number	Interface	Price	Del.
EZMRH-2L10C-OUT	RS232 and RS422/485 only	\$2249	STK
EZMRH-2L10C-E-OUT	Ethernet included	\$2499	3DAY
EZMRH-2L10C-D-OUT	DeviceNet included	\$2499	3DAY
EZMRH-2L10C-P-OUT	Profibus included	\$2599	3DAY

2 Lines 10 Characters Dimensions

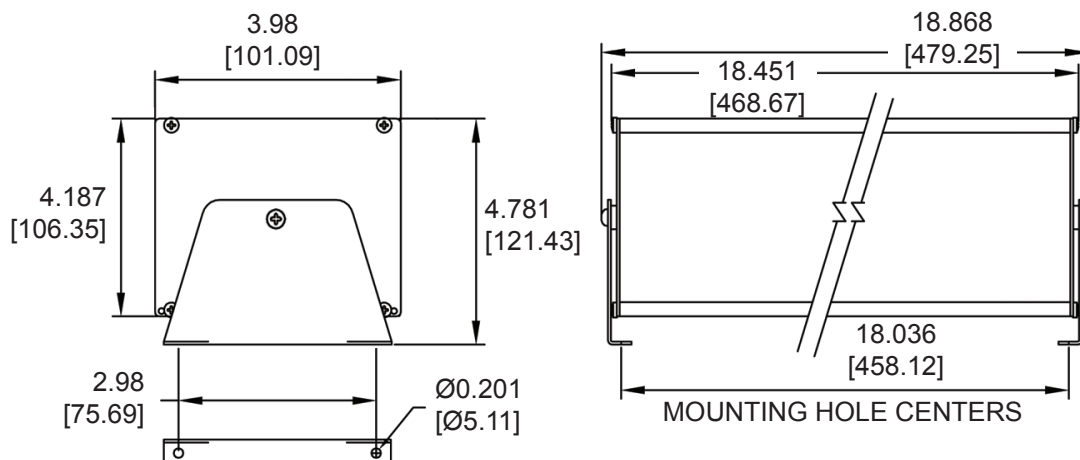

EZMarquee - 1 Line 20 Characters (Indoor Sunlight)

1 Line 20 Characters - NEMA 12

The 1 Line 20 Char EZMarquee can hold up to a maximum of 20 characters (2") per line and features 1 line of RED/Tri-Color LEDs. EZMarquees are enclosed in NEMA 12 extruded aluminum housing with NEMA ICS 2-230 level of electrical noise immunity.

All 1 Line 20 Character models are capable of communicating over RS232 and RS422/485 along with different models for Ethernet, DeviceNet and Profibus connectivity.

Characteristics:

Character Height:	2"
Characters per Line:	20
Number of Lines:	1
Visibility:	100'

1 Line 20 Characters feature:

- 1 line of 10 characters max
- Pre-matched LEDs
- 24 Hour Burn-In tested
- International Character Set
- Hang Mounting
- NEMA 12 Housing
- NEMA ICS 2-230
- 110/220 VAC Power Input
- Surge Protection
- 100,000+ Hours Rated Life

See the different communication interface options available in the charts below





RED Indoor

RED High-bright

Model Number	Interface	Price	Del.
EZMRH-1L20C	RS232 and RS422/485 only	\$1299	STK
EZMRH-1L20C-E	Ethernet included	\$1499	3DAY
EZMRH-1L20C-D	DeviceNet included	\$1499	3DAY
EZMRH-1L20C-P	Profibus included	\$1599	3DAY

1 Line 20 Characters Dimensions

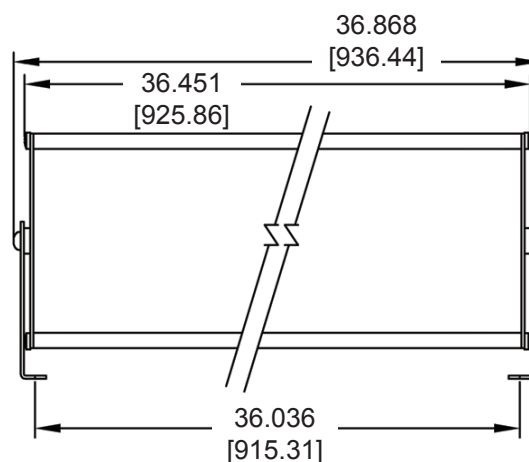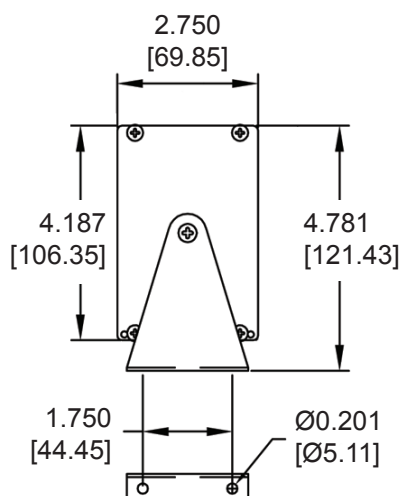

MOUNTING HOLE CENTERS

EZMarquee - 1 Line 20 Characters (Outdoor Sunlight)

1 Line 20 Characters - NEMA 4X

The 1 Line 20 Char EZMarquee can hold up to a maximum of 20 characters (2") per line and features 1 line of RED/Tri-Color LEDs. EZMarquees are enclosed in NEMA 4X extruded aluminum housing with NEMA ICS 2-230 level of electrical noise immunity.

All 1 Line 20 Character models are capable of communicating over RS232 and RS422/485 along with different models for Ethernet, DeviceNet and Profibus connectivity.

Characteristics:

Character Height:	2"
Characters per Line:	20
Number of Lines:	1
Visibility:	100'

1 Line 20 Characters feature:

- 1 line of 10 characters max
- Pre-matched LEDs
- 24 Hour Burn-In tested
- International Character Set
- Hang Mounting
- NEMA 12 Housing
- NEMA ICS 2-230
- 110/220 VAC Power Input
- Surge Protection
- 100,000+ Hours Rated Life

See the different communication interface options available in the charts below




RED Outdoor

RED Outdoor Highbright

Model Number	Interface	Price	Del.
EZMRH-1L20C-OUT	RS232 and RS422/485 only	\$1999	STK
EZMRH-1L20C-E-OUT	Ethernet included	\$2499	3DAY
EZMRH-1L20C-D-OUT	DeviceNet included	\$2499	3DAY
EZMRH-1L20C-P-OUT	Profibus included	\$1499	3DAY

1 Line 20 Characters Dimensions

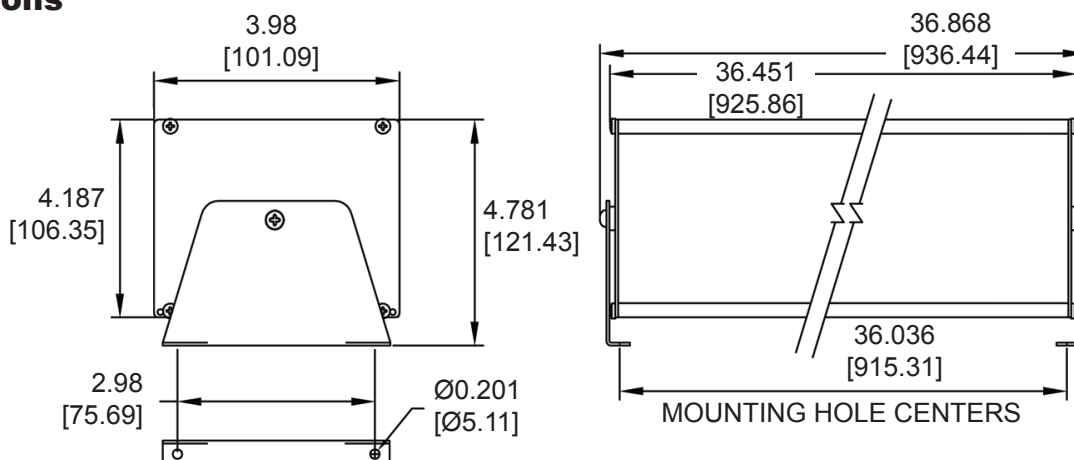

EZMarquee - 2 Lines 20 Characters (Indoor Sunlight)

2 Lines 20 Characters - NEMA 12

The 2 Line 20 Char EZMarquee can hold up to a maximum of 20 characters (2") per line and features 2 lines of RED/Tri-Color LEDs. EZMarquees are enclosed in NEMA 12 extruded aluminum housing with NEMA ICS 2-230 level of electrical noise immunity.

All 2 Line 20 Character models are capable of communicating over RS232 and RS422/485 along with different models for Ethernet, DeviceNet and Profibus connectivity.

Characteristics:

Character Height:	2" / 4"
Characters per Line:	20 / 10
Number of Lines:	2 / 1
Visibility:	100' / 200'

2 Lines 20 Characters feature:

- 2 lines of 20 characters max
- Pre-matched LEDs
- 24 Hour Burn-In tested
- International Character Set
- Hang Mounting
- NEMA 12 Housing
- NEMA ICS 2-230
- 110/220 VAC Power Input
- Surge Protection
- 100,000+ Hours Rated Life

See the different communication interface options available in the charts below





RED Indoor

RED High-bright

Model Number	Interface	Price	Del.
EZMRH-2L20C	RS232 and RS422/485 only	\$1999	STK
EZMRH-2L20C-E	Ethernet included	\$2259	3DAY
EZMRH-2L20C-D	DeviceNet included	\$2259	3DAY
EZMRH-2L20C-P	Profibus included	\$2499	3DAY

2 Lines 20 Characters Dimensions

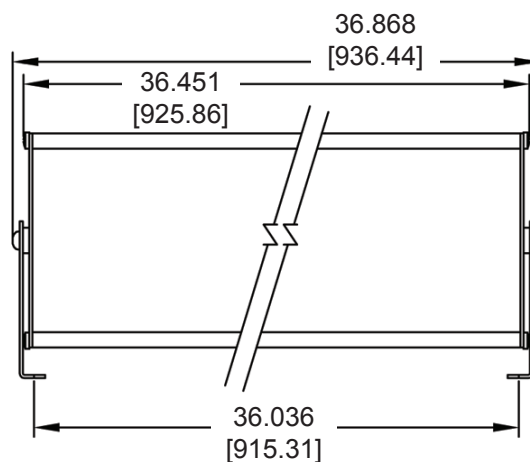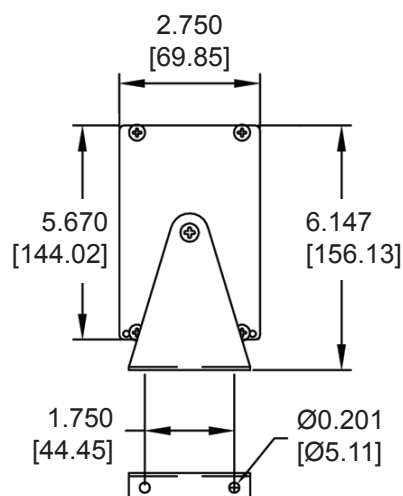

MOUNTING HOLE CENTERS

EZMarquee - 2 Lines 20 Characters (Outdoor Sunlight)

2 Lines 20 Characters - NEMA 4X

The 2 Line 20 Char EZMarquee can hold up to a maximum of 20 characters (2") per line and features 2 lines of RED/Tri-Color LEDs. EZMarquees are enclosed in NEMA 4X extruded aluminum housing with NEMA ICS 2-230 level of electrical noise immunity.

All 2 Line 20 Character models are capable of communicating over RS232 and RS422/485 along with different models for Ethernet, DeviceNet and Profibus connectivity.

Characteristics:

Character Height:	2" / 4"
Characters per Line:	20 / 10
Number of Lines:	2 / 1
Visibility:	100' / 200'

2 Lines 20 Characters feature:

- 2 lines of 20 characters max
- Pre-matched LEDs
- 24 Hour Burn-In tested
- International Character Set
- Hang Mounting
- NEMA 12 Housing
- NEMA ICS 2-230
- 110/220 VAC Power Input
- Surge Protection
- 100,000+ Hours Rated Life

See the different communication interface options available in the charts below




RED Outdoor

RED Outdoor Highbright

Model Number	Interface	Price	Del.
EZMRH-2L20C-OUT	RS232 and RS422/485 only	\$3199	STK
EZMRH-2L20C-E-OUT	Ethernet included	\$3499	3DAY
EZMRH-2L20C-D-OUT	DeviceNet included	\$3499	3DAY
EZMRH-2L20C-P-OUT	Profibus included	\$3599	3DAY

2 Lines 20 Characters Dimensions

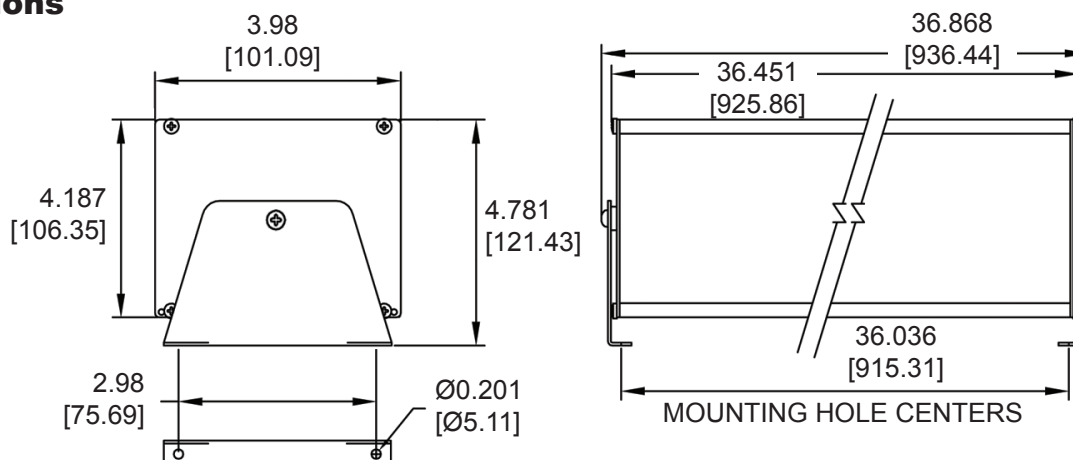

EZMarquee - 4 Lines 20 Characters (Indoor Sunlight)

4 Lines 20 Characters - NEMA 12

The 4 Line 20 Char EZMarquee can hold up to a maximum of 20 characters (2") per line and features 4 lines of RED/Tri-Color LEDs. EZMarquees are enclosed in NEMA 12 extruded aluminum housing with NEMA ICS 2-230 level of electrical noise immunity.

All 4 Line 20 Character models are capable of communicating over RS232 and RS422/485 along with different models for Ethernet, DeviceNet and Profibus connectivity.

Characteristics:

Character Height:	2" / 4" / 6" / 8"
Characters per Line:	20 / 10 / 6 / 5
Number of Lines:	4 / 2 / 1 / 1
Visibility:	100'/200'/300'/400'

4 Lines 20 Characters feature:

- 4 lines of 20 characters max
- Pre-matched LEDs
- 24 Hour Burn-In tested
- International Character Set
- Hang Mounting
- NEMA 12 Housing
- NEMA ICS 2-230
- 110/220 VAC Power Input
- Surge Protection
- 100,000+ Hours Rated Life

See the different communication interface options available in the charts below




RED Indoor

RED High-bright

Model Number	Interface	Price	Del.
EZMRH-4L20C	RS232 and RS422/485 only	\$3799	STK
EZMRH-4L20C-E	Ethernet included	\$3999	3DAY
EZMRH-4L20C-D	DeviceNet included	\$3999	3DAY
EZMRH-4L20C-P	Profibus included	\$3999	3DAY

4 Lines 20 Characters Dimensions

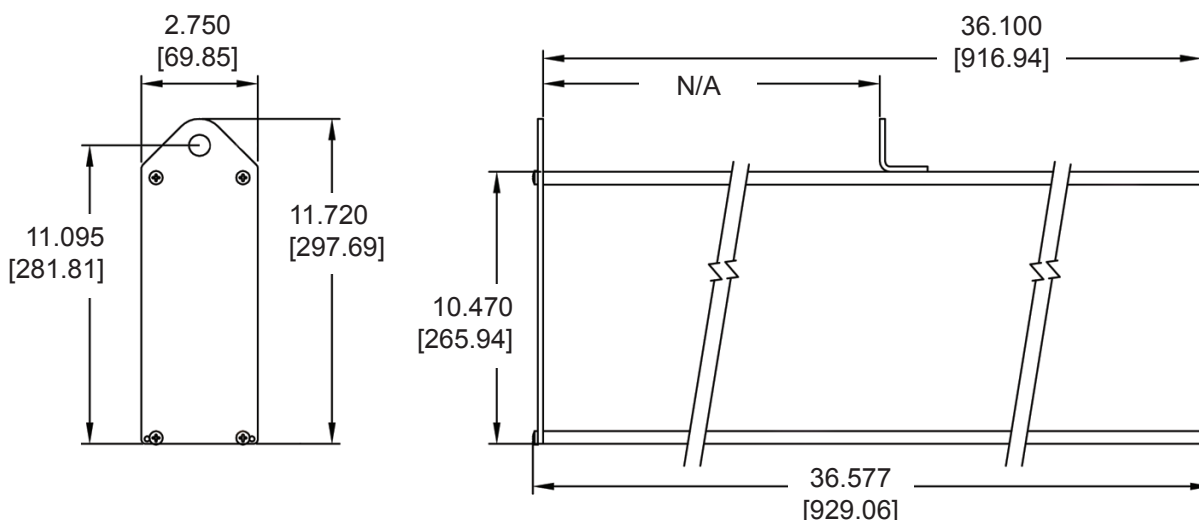

EZMarquee - 4 Lines 20 Characters (Outdoor Sunlight)

4 Lines 20 Characters - NEMA 4X

The 4 Line 20 Char EZMarquee can hold up to a maximum of 20 characters (2") per line and features 4 lines of RED/Tri-Color LEDs. EZMarquees are enclosed in NEMA 4X extruded aluminum housing with NEMA ICS 2-230 level of electrical noise immunity.

All 4 Line 20 Character models are capable of communicating over RS232 and RS422/485 along with different models for Ethernet, DeviceNet and Profibus connectivity.

Characteristics:

Character Height:	2" / 4" / 6" / 8"
Characters per Line:	20 / 10 / 6 / 5
Number of Lines:	4 / 2 / 1 / 1
Visibility:	100' / 200' / 300' / 400'

4 Lines 20 Characters feature:

- 4 lines of 20 characters max
- Pre-matched LEDs
- 24 Hour Burn-In tested
- International Character Set
- Hang Mounting
- NEMA 12 Housing
- NEMA ICS 2-230
- 110/220 VAC Power Input
- Surge Protection
- 100,000+ Hours Rated Life

See the different communication interface options available in the charts below




RED Outdoor

RED Outdoor Highbright

Model Number	Interface	Price	Del.
EZMR-H4L20C-OUT	RS232 and RS422/485 only	\$5559	STK
EZMRH-4L20C-E-OUT	Ethernet included	\$5999	3DAY
EZMRH-4L20C-D-OUT	DeviceNet included	\$5999	3DAY
EZMRH-4L20C-P-OUT	Profibus included	\$5999	3DAY

4 Lines 20 Characters Dimensions

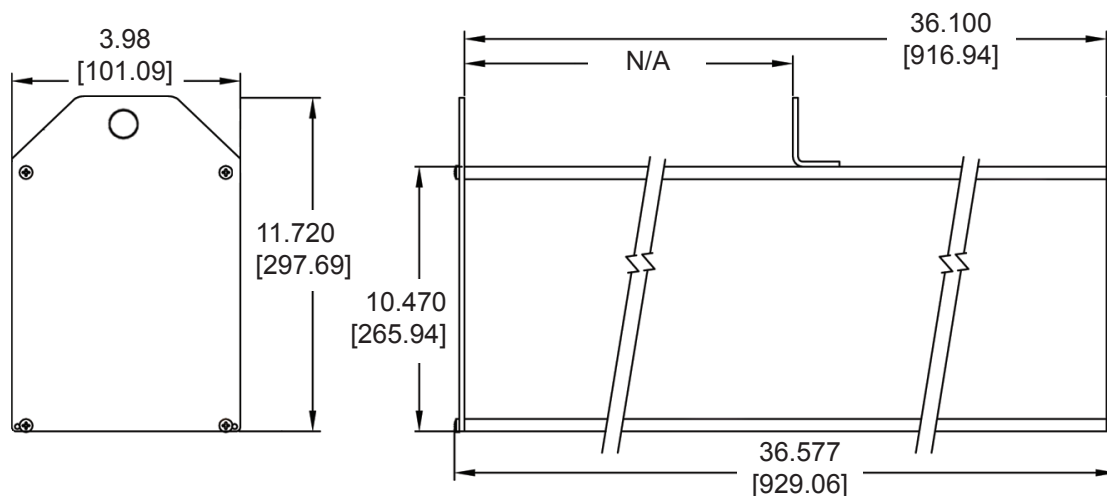

EZMarquee - 1 Line 40 Characters (Indoor Sunlight)

1 Line 40 Characters - NEMA 12

The 1 Line 40 Char EZMarquee can hold up to a maximum of 40 characters (2") per line and features 1 line of RED/Tri-Color LEDs. EZMarquees are enclosed in NEMA 12 extruded aluminum housing with NEMA ICS 2-230 level of electrical noise immunity.

All 1 Line 40 Character models are capable of communicating over RS232 and RS422/485 along with different models for Ethernet, DeviceNet and Profibus connectivity.


Characteristics:

Character Height:	2"
Characters per Line:	40
Number of Lines:	1
Visibility:	100'

1 Line 40 Characters feature:

- 1 line of 40 characters max
- Pre-matched LEDs
- 24 Hour Burn-In tested
- International Character Set
- Hang Mounting
- NEMA 12 Housing
- NEMA ICS 2-230
- 110/220 VAC Power Input
- Surge Protection
- 100,000+ Hours Rated Life

See the different communication interface options available in the charts below





RED Indoor

RED High-bright

Model Number	Interface	Price	Del.
EZMRH-1L40C	RS232 and RS422/485 only	\$2099	STK
EZMRH-1L40C-E	Ethernet included	\$2259	3DAY
EZMRH-1L40C-D	DeviceNet included	\$2259	3DAY
EZMRH-1L40C-P	Profibus included	\$2359	3DAY

1 Line 40 Characters Dimensions

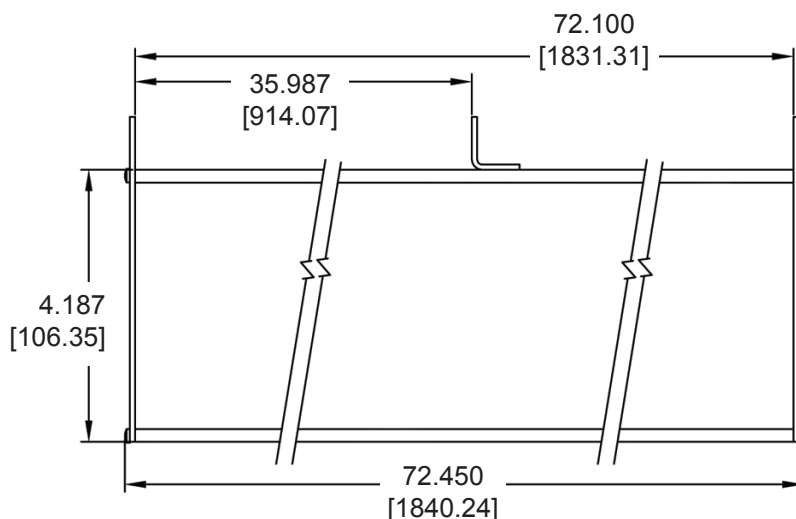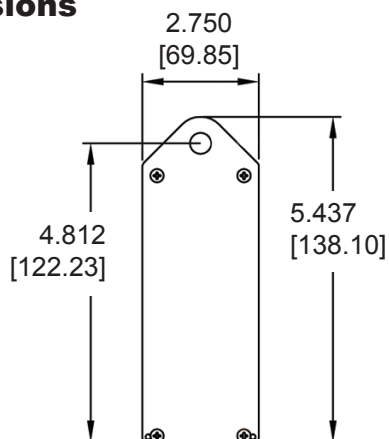

EZMarquee - 1 Line 40 Characters (Outdoor Sunlight)

1 Line 40 Characters - NEMA 4X

The 1 Line 40 Char EZMarquee can hold up to a maximum of 40 characters (2") per line and features 1 line of RED/Tri-Color LEDs. EZMarquees are enclosed in NEMA 4X extruded aluminum housing with NEMA ICS 2-230 level of electrical noise immunity. All 1 Line 40 Character models are capable of communicating over RS232 and RS422/485 along with different models for Ethernet, DeviceNet and Profibus connectivity.

Characteristics:

Character Height:	2"
Characters per Line:	40
Number of Lines:	1
Visibility:	100'

1 Line 40 Characters feature:

- 1 line of 40 characters max
- Pre-matched LEDs
- 24 Hour Burn-In tested
- International Character Set
- Hang Mounting
- NEMA 4/4X Outdoor Housing
- NEMA ICS 2-230
- 110/220 VAC Power Input
- Surge Protection
- 100,000+ Hours Rated Life

See the different communication interface options available in the charts below




RED Outdoor

RED Outdoor Highbright

Model Number	Interface	Price	Del.
EZMRH-1L40C-OUT	RS232 and RS422/485 only	\$2999	STK
EZMRH-1L40C-E-OUT	Ethernet included	\$3499	3DAY
EZMRH-1L40C-D-OUT	DeviceNet included	\$3499	3DAY
EZMRH-1L40C-P-OUT	Profibus included	\$3499	3DAY

1 Line 40 Characters Dimensions

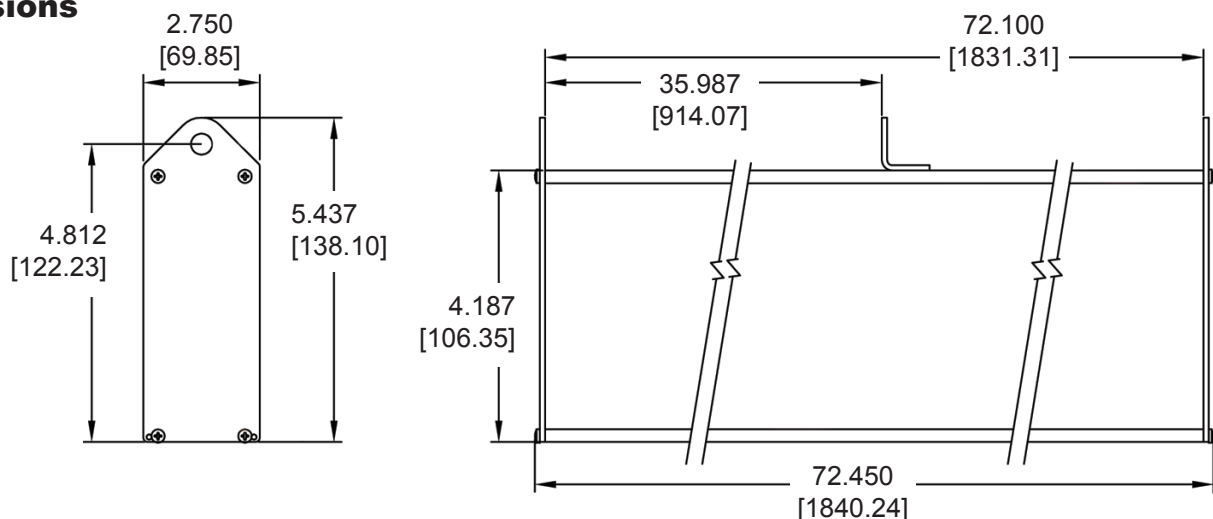

EZMarquee - 2 Lines 40 Characters (Indoor Sunlight)

2 Lines 40 Characters - NEMA 12

The 2 Line 40 Char EZMarquee can hold up to a maximum of 40 characters (2") per line and features 2 lines of RED/Tri-Color LEDs. EZMarquees are enclosed in NEMA 12 extruded aluminum housing with NEMA ICS 2-230 level of electrical noise immunity.

All 2 Line 40 Character models are capable of communicating over RS232 and RS422/485 along with different models for Ethernet, DeviceNet and Profibus connectivity.

Characteristics:

Character Height:	2" / 4"
Characters per Line:	40 / 20
Number of Lines:	2 / 1
Visibility:	100' / 200'

2 Lines 40 Characters feature:

- 2 lines of 40 characters max
- Pre-matched LEDs
- 24 Hour Burn-In tested
- International Character Set
- Hang Mounting
- NEMA 12 Housing
- NEMA ICS 2-230
- 110/220 VAC Power Input
- Surge Protection
- 100,000+ Hours Rated Life

See the different communication interface options available in the charts below




RED Indoor

RED High-bright

Model Number	Interface	Price	Del.
EZMRH-2L40C	RS232 and RS422/485 only	\$3799	3DAY
EZMRH-2L40C-E	Ethernet included	\$3999	3DAY
EZMRH-2L40C-D	DeviceNet included	\$3999	3DAY
EZMRH-2L40C-P	Profibus included	\$3999	3DAY

2 Lines 40 Characters Dimensions

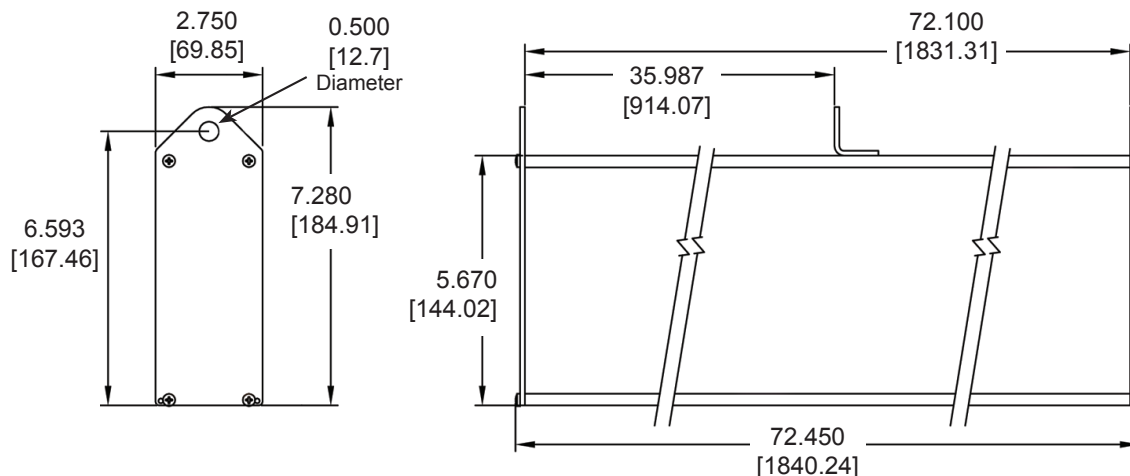

EZMarquee - 2 Lines 40 Characters (Outdoor Sunlight)

2 Lines 40 Characters - NEMA 4X

The 2 Line 40 Char EZMarquee can hold up to a maximum of 40 characters (2") per line and features 2 lines of RED/Tri-Color LEDs. EZMarquees are enclosed in NEMA 4X extruded aluminum housing with NEMA ICS 2-230 level of electrical noise immunity. All 2 Line 40 Character models are capable of communicating over RS232 and RS422/485 along with different models for Ethernet, DeviceNet and Profibus connectivity.

Characteristics:

Character Height:	2" / 4"
Characters per Line:	40 / 20
Number of Lines:	2 / 1
Visibility:	100' / 200'

2 Lines 40 Characters feature:

- 2 lines of 40 characters max
- Pre-matched LEDs
- 24 Hour Burn-In tested
- International Character Set
- Hang Mounting
- NEMA 4/4X Outdoor Housing
- NEMA ICS 2-230
- 110/220 VAC Power Input
- Surge Protection
- 100,000+ Hours Rated Life

See the different communication interface options available in the charts below




RED Outdoor

RED Outdoor Highbright

Model Number	Interface	Price	Del.
EZMRH-2L40C-OUT	RS232 and RS422/485 only	\$5599	3DAY
EZMRH-2L40C-E-OUT	Ethernet included	\$5799	3DAY
EZMRH-2L40C-D-OUT	DeviceNet included	\$5799	3DAY
EZMRH-2L40C-P-OUT	Profibus included	\$5999	3DAY

EZ Marquee

2 Lines 40 Characters Dimensions

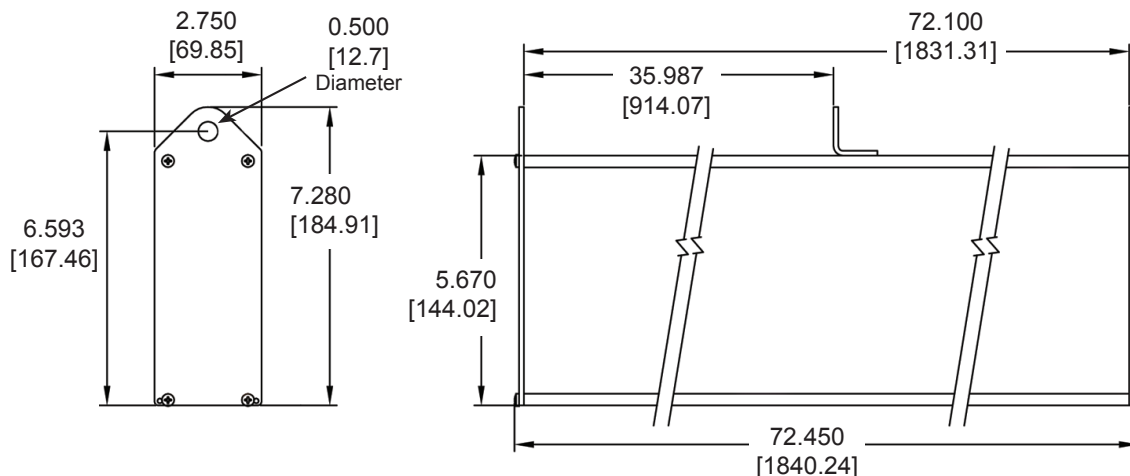

EZMarquee - 4 Lines 40 Characters (Indoor Sunlight)

4 Lines 40 Characters - NEMA 12

The 4 Line 40 Char EZMarquee can hold up to a maximum of 40 characters (2") per line and features 4 lines of RED/Tri-Color LEDs. EZMarquees are enclosed in NEMA 12 extruded aluminum housing with NEMA ICS 2-230 level of electrical noise immunity.

All 4 Line 40 Character models are capable of communicating over RS232 and RS422/485 along with different models for Ethernet, DeviceNet and Profibus connectivity.

Characteristics:

Character Height:	2" / 4" / 6" / 8"
Characters per Line:	40 / 20 / 13 / 10
Number of Lines:	4 / 2 / 1 / 1
Visibility:	100' / 200' / 300' / 400'

4 Lines 40 Characters feature:

- 4 lines of 40 characters max
- Pre-matched LEDs
- 24 Hour Burn-In tested
- International Character Set
- Hang Mounting
- NEMA 12 Housing
- NEMA ICS 2-230
- 110/220 VAC Power Input
- Surge Protection
- 100,000+ Hours Rated Life

See the different communication interface options available in the charts below




RED Indoor

RED High-bright

Model Number	Interface	Price	Del.
EZMRH-4L40C	RS232 and RS422/485 only	\$5699	3DAY
EZMRH-4L40C-E	Ethernet included	\$5999	3DAY
EZMRH-4L40C-D	DeviceNet included	\$5899	3DAY
EZMRH-4L40C-P	Profibus included	\$5999	3DAY

4 Lines 40 Characters Dimensions

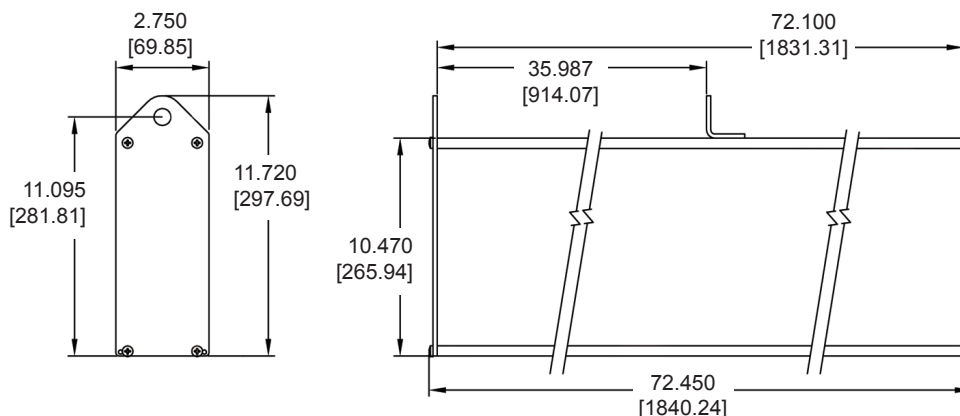

EZMarquee - 4 Lines 40 Characters (Outdoor Sunlight)

4 Lines 40 Characters - NEMA 4X

The 4 Line 40 Char EZMarquee can hold up to a maximum of 40 characters (2") per line and features 4 lines of RED/Tri-Color LEDs. EZMarquees are enclosed in NEMA 4X extruded aluminum housing with NEMA ICS 2-230 level of electrical noise immunity.

All 4 Line 40 Character models are capable of communicating over RS232 and RS422/485 along with different models for Ethernet, DeviceNet and Profibus connectivity.

Characteristics:

Character Height:	2" / 4" / 6" / 8"
Characters per Line:	40 / 20 / 13 / 10
Number of Lines:	4 / 2 / 1 / 1
Visibility:	100' / 200' / 300' / 400'

4 Lines 40 Characters feature:

- 4 lines of 40 characters max
- Pre-matched LEDs
- 24 Hour Burn-In tested
- International Character Set
- Hang Mounting
- NEMA 4/4X Outdoor Housing
- NEMA ICS 2-230
- 110/220 VAC Power Input
- Surge Protection
- 100,000+ Hours Rated Life

See the different communication interface options available in the charts below



RED Outdoor
RED Outdoor Highbright

Model Number	Interface	Price	Del.
EZMRH-4L40C-OUT	RS232 and RS422/485 only	\$8299	3DAY
EZMRH-4L40C-E-OUT	Ethernet included	\$8599	3DAY
EZMRH-4L40C-D-OUT	DeviceNet included	\$8599	3DAY
EZMRH-4L40C-P-OUT	Profibus included	\$8899	3DAY

EZ Marquee

4 Lines 40 Characters Dimensions

